

# “Digital Color Videophone”

KCV-W354 / KCV-DW354,

KCV-A374 Introduction



# “4 Wire Digital Color Videophone”



# Components

## Indoor Unit



**KCV-W354 / KCV-DW354**  
Monitor, Surface



**KCV-A374**  
Monitor, Surface



**KDP-602G**

**Sub Audio  
Phone  
Surface**

## Door Camera



**KC-C60**

**Plastic,  
Normal lens,  
Surface**



**KC-MC24**

**Metal,  
Pinhole lens,  
Surface**



**KC-MC31**

**Metal,  
Normal lens,  
Surface**



**KC-MC30**


**Metal, Normal lens,  
Surface, Name plate,  
Angle adjustable**

# Key Features

## 1. “Easy & Simple Installation with 4 Wires”



Or

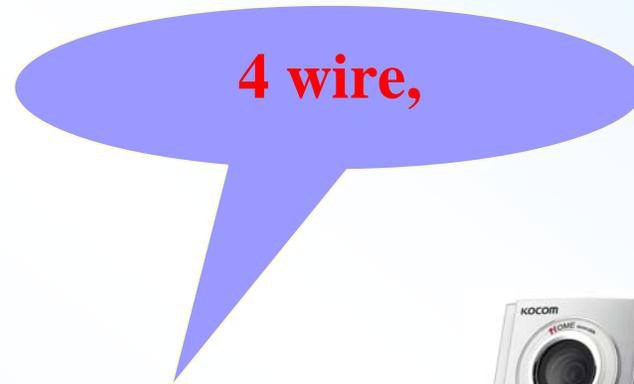


With 4 wires, anyone can install it easily.

## 2. “Compact & Slim Design”



**Dimension (mm) :**  
**KCV-W354 : 195(W) x 140(H) x 34(D)**

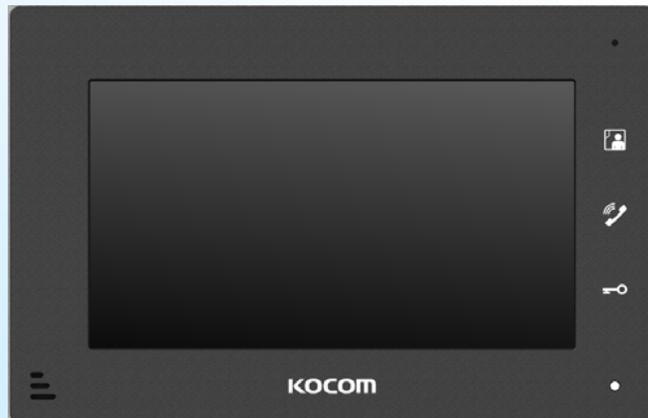


**Dimension (mm) :**  
**KCV-A374 : 222(W) x 144(H) x 33(D)**

### 3. “Digital Color LCD”



#### Digital 3.5” LCD

offers perfect, clear & high quality image. NTSC/PAL auto switching.

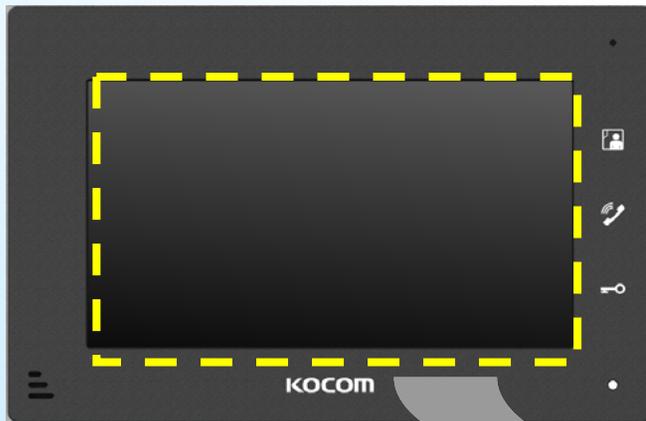

#### Digital 7” LCD

offers perfect, clear & high quality image. NTSC/PAL auto switching.


## 4. “OSD in Operating Condition”

Thanks to applied OSD function, the operating conditions like CAM1 Call, CAM2 Call, CAM1 Talk, CAM2 Talk, CAM1 View, CAM2 View, SUB Call, SUB Talk, Door open, LCD color brightness are visible on screen.



**CAM1, CAM2, SUB Call**

**Calling status**



**CAM1, CAM2 View**

**Monitoring status**




**CAM1, CAM2, SUB Talk**

**Talking status**




**Open**

**Door open in calling status**



**Open**

**Door open in monitoring status**




**Open**

**Door open in talking status**

Bright : 7




**Brightness control**

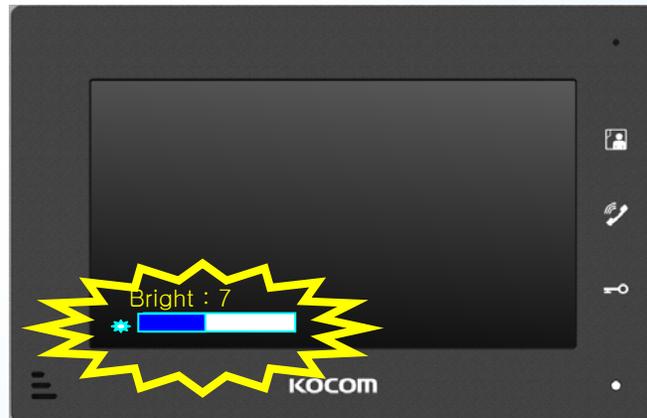

## 5. “Long Distance Connection”

Adapting high technology & knowhow, it can be used at the distance of 100ms using UTP or CAT5 cable. (TIV1.0mm : over 150ms)  
Coaxial cable is no longer necessary. (saving of cable cost)

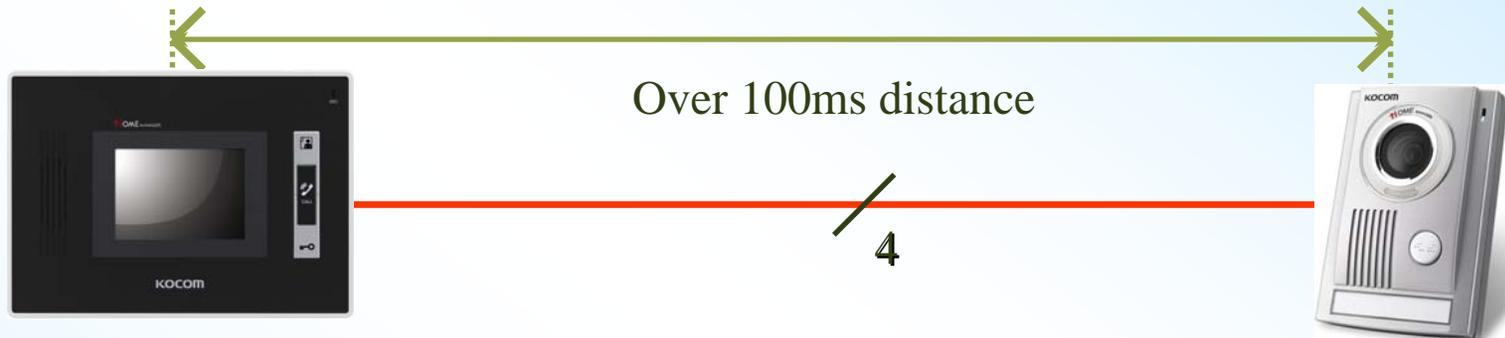

## 6. “Combination & Intercom function of Indoors”

KCV-W354 or KCV-A374 can be used as Main or Sub monitor with the combination of indoor units like KDP-602G (Sub Audiophone), KVM-301 (B/W Monitor) & KCV-801 /KCV-801R (Color Monitor)




# 7. “Door Lock Connection”

Door lock connection is available either monitor or camera.

## \* Door lock connection to the Door Camera

Dry contact type DC Door lock (DC12V ~24V/ 1A or below) can be used.

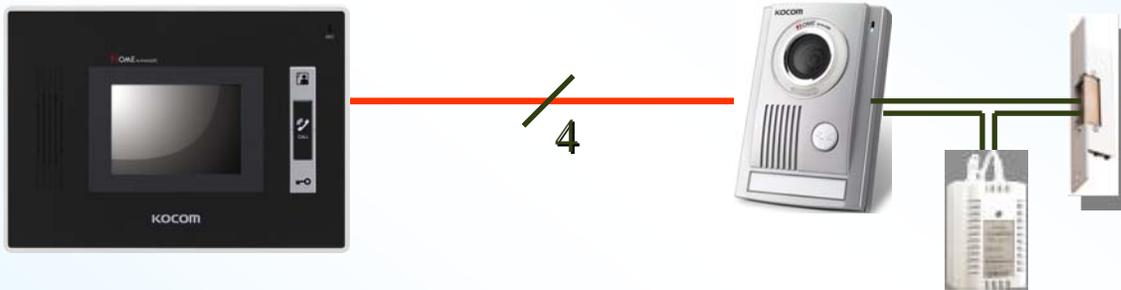

## \* Door lock connection to the Monitor

Dry contact type DC Door lock (DC12V~30V/ 3A) or AC Door lock (AC90V~250V/ 3A) can be used.



## 8. “Additional Features”

- 5 Melody Selection

Camera 1, Camera 2, Intercom call sounds can be selected in different melody to recognize where call from.

- CCTV Monitoring function in 3 Min.

- Power

**KCV-W354** : Built in AC Type (SMPS AC 100V ~ AC 240V)

**KCV-WD354** : Low Voltage DC type (DC12V  $\pm$  0.5V/ 1.5A)

**KCV-A374** : Built in AC Type (SMPS AC 100V ~ AC 240V)

- Ultra low power consumption

(0.7W on standby, 10.5W in Operation)

- Additional monitor connection

Upto 2cameras & 4 Indoor units connection

- Compact and Stylish Design

(**KCV-A374** : White or Black Color Monitor Choice)

- Replacing highly performed B/W video phone, with reasonable price.