

# Videophone System



*New*



## 4Wire 4" Color Handset Type

# KCV-301


- 4" Color Digital LCD (NTSC/PAL)
- Door open during communication
- Easy & simple installation with only 4 wires
- Intercom function between extended indoor units
- Surface mount type installation

- External 64 cut memory equipment (KVR-300) connection -(B/W)\*option
- Connection with up to 2 door cameras, 2 monitors and 2 sub audio phone (KDP-602G)\*option
- 5 melody selection


### Specifications

- Power : AC 90-240V 50Hz / 60Hz, DC12V
- Power consumption : Stand by 2W, Max. 15W
- Monitor : 4" Color Digital LCD (NTSC / PAL Auto switching)
- Wiring : Camera : 4 wire (Polarity) , Sub audio phone : 6Wire(Polarity)  
 Extension monitor : 8 wire (Polarity)  
 Max.Wiring distance : 0.65mmx4P : 100m  
 Max.Wiring distance : UTP (CAT5) : 100m  
 TIV 0.8mm : 120m, TIV 1.0mm : 150m
- Communication System : Duplex Handset type
- Mount Type : Surface Mount
- Dimension (mm) : 210(W)×222(H)×57(D)
- Indoor unit connection : KDP-602G (Audio phone), KVM-301, KCV-W354, KCV-801R, KCV-801
- Camera Connection : KC-C60, KC-MC30, KC-MC31, KC-MC24, KC-MC20  
 Common gate camera : KVL-C302i, KVL-C303i, KVL-C304i, KVL-TC306i, KVL-TC308i

### Wiring Diagram

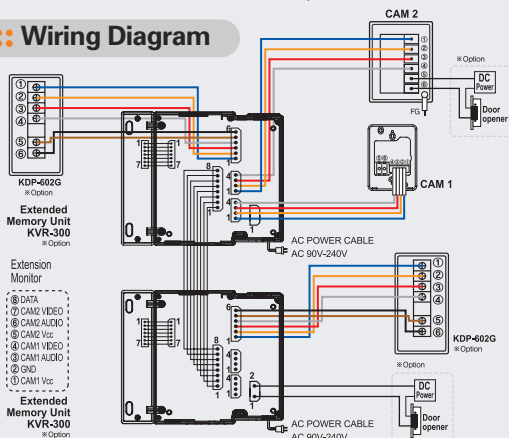

### System Diagram

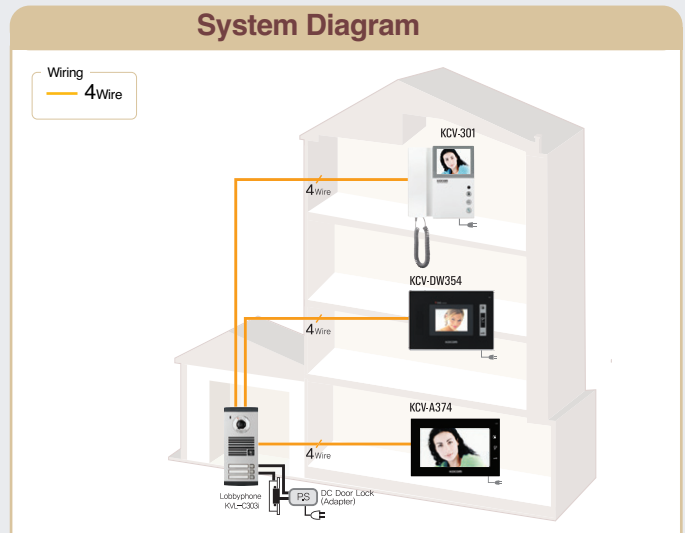

### Door Camera



### Option

